



# PRODUCT TECHNICAL SHEET

PC-LILAC-CH/SN/ORB

KITCHEN GOOSENECK PULL DOWN FAUCET



## DIMENSIONS

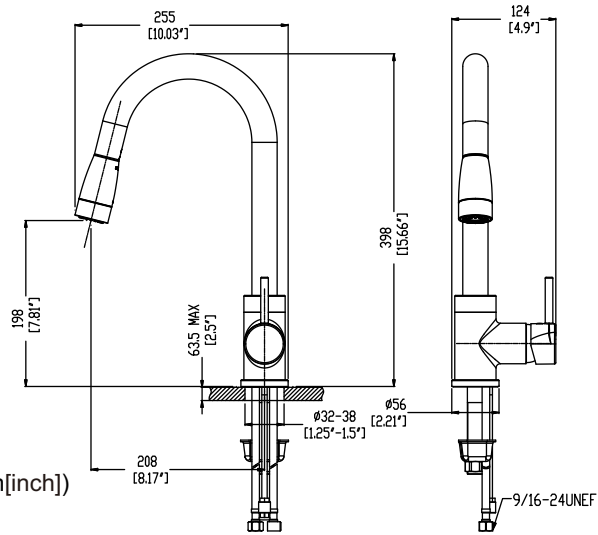

■ For Reference only (unit = mm[inch])

## TECHNICAL DETAILS

Please read the followings before installing and usage.

### 1 Description

- Metal handle
- 360° swing spout
- Metal construction
- Ceramic disc Cartridge
- 2 setting pull down spray

### 2 Technique Parameter

| Parameter                     | Water Pressure | Water Temperature |
|-------------------------------|----------------|-------------------|
| Market                        |                |                   |
| ASME A112.18.1/<br>CSA B125.1 | 20-80PSI       | 10-65°C           |
| EN817                         | 0.1-0.5MPa     | 10-65°C           |

### 3 Certificate




### 4 Surface maintenance

Remove any surface dirt and film using clean water and cotton cloth.  
 Spray cleaner such as mild liquid detergents, clear liquid glass cleaner, non-acidic and fully dissolved powder cleaners or non-abrasive liquid polishers on the rag to clean the faucet surface.  
 Once clean, rinse faucet again with clear water to thoroughly remove cleaner and dry with soft cotton cloth.

## EXPLODED DRAWING

Please read the followings before installing and usage.

| NO. | Description       | Part No. | Qty |
|-----|-------------------|----------|-----|
| 01  | SHOWER            | ATBE0124 | 1   |
| 02  | CAP               | CTCP0072 | 1   |
| 03  | CARTRIDGE         | ATBA0161 | 1   |
| 04  | GASKET            | CTLT0020 | 1   |
| 05  | NUT               | CTNB0276 | 1   |
| 06  | HOSE(9/16-24UNEF) | ATBP1018 | 2   |

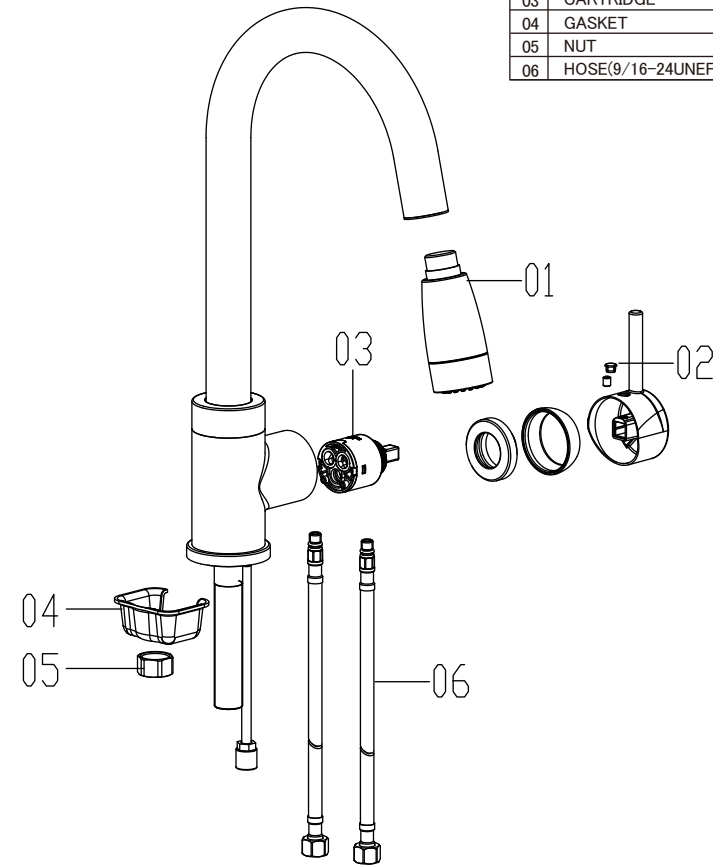

■ Notes: For reference only. We reserve the right to make changes without any notice.



Professional Home Supply, LLC.  
 4986 113th Ave. N Clearwater. FL 33760  
 ( 727 ) 433-8776  
[www.prohs.com](http://www.prohs.com)